

Finally...
a lightweight, easy-to-install condenser pad
that meets wind loading requirements
up to 180 MPH!

Protected by U.S. Patent #10,408,493, #10,559,742
and other Patents Pending

QT8036 / QT8040

QwikPad[®] for Condensers

5 Our 36" x 36" pad weighs just 29 lbs for transport, but 163 pounds once filled. The 40" x 40" pad weighs just 35 lbs for transport, but 203 lbs filled.


1 Rated for winds up to 180 mph and exceeds Miami-Dade 175 mph wind requirements.

2 UV-resistant, high-durability construction is lightweight (*for shipping and easy 1-man handling*), but heavy once filled.

3 Contains a super absorbent material that acts as a unique gelling agent... Once water is added, it forms a solidus gel that provides freeze protection.

4 Includes corrosion-resistant **Tie-Down Assemblies** to secure the outdoor unit for exceptional hurricane protection (**304 Stainless Steel, 13 gauge**). **Tie-Down Assemblies** are completely adjustable to properly secure any size and shape of outdoor unit.

Included Hardware:



QwikPad[®] "L" Bracket (4)



Carriage Bolt Holder (4)



1/4"-20 x 4" Carriage Bolt (4)



#10-16 x 3/4" Self-Drilling, Hex Head Screw (8)



1/4"-20 Serrated Flange Nut (4)



Builds (4) Stainless Steel Tie-Down Assemblies

Water Fill Plug

QwikPad[®] for Condensers

The Florida building code rated air conditioning support pad is lightweight when purchased, but weighs enough to meet code requirements up to 180 mph wind loading when filled with water and secured with stainless steel tie-down assemblies (supplied). Each pad includes a unique gelling agent that, once water is added, forms a solidus gel. Optional ground and concrete anchors provide additional hurricane protection when needed.

FLORIDA BUILDING CODE NOTICE

This product meets the following building code requirements:

1. **Mechanical Vol., Sect. 304.10 Clearances from Grade** – This product provides 4" of clearance above adjoining grade.
2. **Mechanical Vol., Sect. 301.15 Wind resistance** – Load combinations in accordance with the Florida Building Code, Building Vol. – Ch. 16 and ASCE 7 – Ch. 2.

Wind pressure calculations performed per Florida Building Code- Ch. 16 and ASCE 7 - Ch. 29. For the most up-to-date documentation, visit our website, www.qwik.com/qwikpad4cond or call **1-800-866-3550**.

To install the unit:

1. Choose acceptable equipment pad size and anchoring method that meets wind loading requirements in your area. Use the load tables included with the QwikPad[®] for **Condensers** or go to www.qwik.com/qwikpad4cond/ to use our automated calculation software.
2. Tip pad towards fill port corner. This will cause gelling agent to collect near fill port for proper distribution when filling.
3. Level the pad on the ground.
4. Fill pad completely with tap water. Water will solidify into gel over time.
5. Install concrete or ground anchors, when required.
6. Secure the equipment to the pad using tie-down assembly hardware.


Specifications

	QT8036	QT8040
Dimensions	36" x 36" x 4"	40" x 40" x 4"
Material	Linear Low Density Polyethylene (LLDPE)	Linear Low Density Polyethylene (LLDPE)
Pad Weight (Empty)	29 lb	35 lb
Pad Weight (Full)	163 lb	203 lb
Maximum Condensing Unit Size	32" x 32"	36" x 36"


Optional Accessories

Anchors may be required to meet high wind loading, depending on the unit size and weight. Use the load tables included with the QwikPad[®] for **Condensers** or go to www.qwik.com/qwikpad4cond/ to use our automated calculation software to determine if anchors are necessary for your installation.

Ground Anchor Kit (pkg of 2) **QT8110**



Concrete Anchor Kit (pkg of 4) **QT8111**

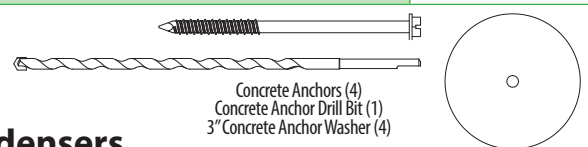

For more details or information about the **QwikPad[®] for Condensers** visit www.qwik.com/qwikpad4cond/ or email info@qwik.com

QwikProducts[®] and QwikPad[®] are registered trademarks of Mainstream Engineering Corporation
Rockledge, Florida 32955, (321) 631-3550 © 2021 Mainstream Engineering Corporation
Protected by U.S. Patent #10,408,493, #10,559,742 and other Patents Pending



Fantastic!

a lightweight, easy-to-install generator pad that meets wind loading requirements **of 180 MPH and Higher!**

U.S. Design Patent: #D945,967
(QT8230)

U.S. Patents: #10,557,589, #11,384,896,
#11,460,148, #11,460,149, #11,649,921
and Other Patents Pending

QwikPad for Generators

5


Unfilled Weight
46 lbs
Filled Weight
330 lbs

1 Rated for winds in excess of 180 MPH and exceeds Miami-Dade hurricane requirements.

2 UV-resistant, high-durability construction is lightweight for shipping and 1-man handling but once filled, more than 50 lbs heavier than competitor's concrete pads.

3 Contains a unique gelling agent that forms a solidus gel and provides freeze protection.

4 Includes corrosion-resistant stainless steel mounting hardware.

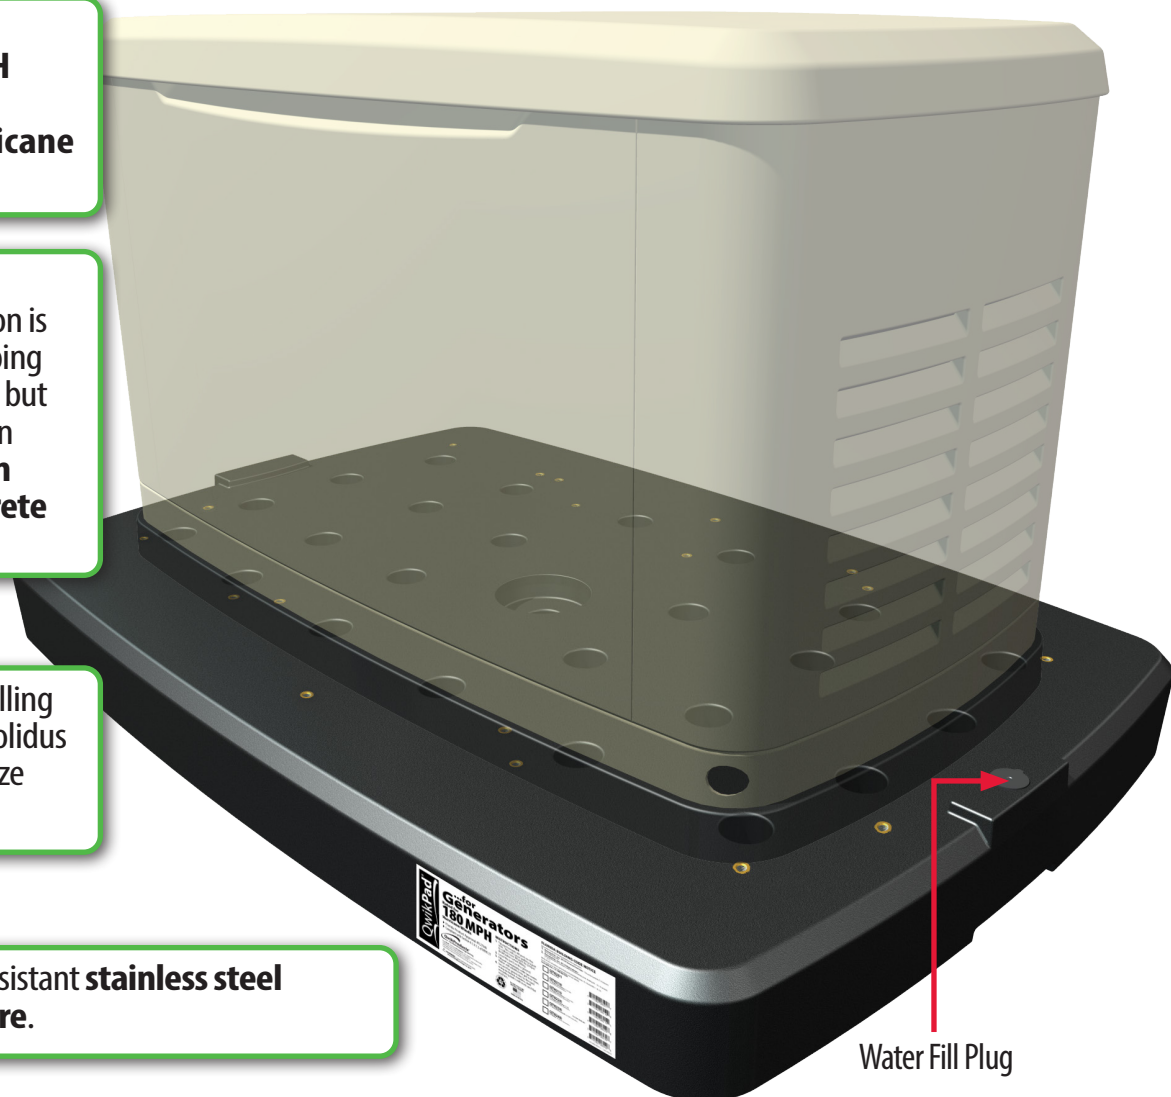

Water Fill Plug

QwikPad for Generators

The Florida Building Code compliant generator support pad is lightweight when purchased, but weighs enough to meet code requirements of **180 mph +** wind loading when filled with water and secured with stainless steel mounting bolts (supplied). Each pad includes a unique gelling agent that, once water is added, forms a solidus gel.

FLORIDA BUILDING CODE NOTICE

This product meets the following building code requirements:

- Mechanical Vol., Sect. 304.10 Clearances from Grade** – This product provides 5" of clearance above adjoining grade.
- Mechanical Vol., Sect. 301.15 Wind resistance** – Load combinations in accordance with the Florida Building Code, Building Vol. – Ch. 16 and ASCE 7 – Ch. 2.

Wind pressure calculations performed per Florida Building Code- Ch. 16 and ASCE 7 - Ch. 29. For the most up-to-date documentation, visit our website, www.qwik.com/qwikpad4gen or call **1-800-866-3550**.

Florida Product Approval #FL27646

This product has been tested by a nationally recognized, independent research and development laboratory and deemed compliant with Section 4.1.4 and Section A.4.1.4.1.2 of the Annex of NFPA 37 (2018), Standard for the Installation and Use of Stationary Combustion Engines and Gas Turbines.

QwikPad for Generators P/N	Description of Generator Model to be mounted
QT8201	Universal Pad (includes hardware for Generac/Honeywell, Kohler and Cummins)
QT8210	For Briggs and Stratton® 17/20 kW Steel Enclosure Generators (hardware included)
QT8215	For Briggs and Stratton® 17/20/26 kW Power Protection Series (hardware included)
QT8220	For Briggs and Stratton® 20 kW Aluminum Enclosure Generators (hardware included)
QT8230	For Generac/Honeywell® 9-26 kW Generators (hardware included)
QT8240	For Kohler® 14/20/26 kW RES/RCA Generators (hardware included)

For more details or information about the **QwikPad for Generators** visit www.qwik.com/qwikpad4gen/ or email info@qwik.com

All other product names and company names are (registered) brand names or trademarks of each respective holders, and Mainstream Engineering Corporation is not necessarily associated or affiliated with them. These names are used solely for the purpose of identifying the specific products that can be used with Mainstream Engineering Corporation's products. QwikProducts® and QwikPad® are registered trademarks of Mainstream Engineering Corporation of Rockledge, Florida 32955, (321) 631-3550 © 2023 Mainstream Engineering Corporation

U.S. Patents: #10,557,589, #11,384,896, #11,460,148, #11,460,149, #11,649,921 and Other Patents Pending

U.S. Design Patent: #D945,967 (QT8230)

