

QwikPad®

QWIKPAD® FOR GENERATORS

A LIGHTWEIGHT, EASY-TO-INSTALL GENERATOR PAD
THAT MEETS WIND LOADING REQUIREMENTS OF


SKUS

QT8202 | QT8231

180 MPH & HIGHER!



UNFILLED WEIGHT
46 LBS



FILLED WEIGHT
330 LBS



KEY QUALITIES



ULTRA-DURABLE

UV-resistant, high-durability construction is light-weight for shipping and 1-man handling but once filled, more than **50 lbs heavier than competitor's concrete pads.**



HURRICANE-RATED

Rated for winds up to **180 mph** and exceeds **Miami-Dade 175 mph** wind requirements.



UNIQUE GELLING AGENT

Once water is added, a super absorbent material forms a **solidus gel**, making the pad weigh about **7x** its initial weight to meet building code requirements.



CORROSION-RESISTANT HARDWARE

Includes corrosion-resistant **stainless steel** mounting hardware.



SCAN TO
LEARN MORE

www.qwik.com/qwikpad4gen/



The Florida Building Code compliant generator support pad is lightweight when purchased, but weighs enough to meet code requirements of **180 mph** + wind loading when filled with water and secured with stainless steel mounting bolts (supplied). Each pad includes a unique gelling agent that, once water is added, forms a solidus gel.

FLORIDA BUILDING CODE NOTICE

This product meets the following building code requirements:

- 1. Mechanical Vol., Sect. 304.10 Clearances from Grade** – This product provides 5" of clearance above adjoining grade.
- 2. Mechanical Vol., Sect. 301.15 Wind resistance** – Load combinations in accordance with the Florida Building Code, Building Vol. – Ch. 16 and ASCE 7 – Ch. 2.

Wind pressure calculations performed per Florida Building Code, Building Vol - Ch. 16 and ASCE 7 - Ch. 29. For the most up-to-date documentation, visit our website, www.qwik.com/qwikpad4gen or call **1-800-866-3550**.


Florida Product Approval #FL27646

This product has been tested by a nationally recognized, independent research and development laboratory and deemed compliant with Section 4.1.4 and Section A.4.1.4.1.2 of the Annex of NFPA 37 (2018), Standard for the Installation and Use of Stationary Combustion Engines and Gas Turbines.

QWIKPAD® FOR GENERATORS P/N	DESCRIPTION OF GENERATOR MODEL TO BE MOUNTED
QT8202	Super Universal Pad (includes hardware for Generac/Honeywell, Kohler, Cummins, Briggs and Stratton - Power Protection Series)
QT8231	For Generac Guardian Series 9-26kw & Next-Gen 10-28kw/Honeywell 9-26 kW Generators (hardware included)

INCLUDED HARDWARE:

Hardware needs are specific to generator model. The hardware shown at the left is included with the Universal Pad model (QT8202).

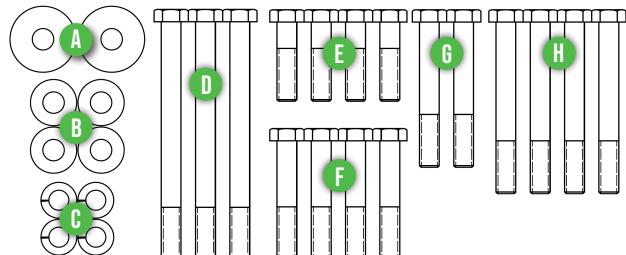

See the model-specific hardware chart on the right of this section.

- A - 2 WASHERS, FLAT 3/8" (Ø 1 1/4")
- B - 4 WASHERS, FLAT 3/8" (Ø 7/8")
- C - 4 WASHERS, LOCK 3/8"
- D - 3 BOLTS, HEX, 3/8-16 (4 1/2")
- E - 4 BOLTS, HEX, 3/8-16 (1 1/2")
- F - 4 BOLTS, HEX, 3/8-16 (2 1/2")
- G - 2 BOLTS, HEX, 3/8-16 (2 3/4")
- H - 4 BOLTS, HEX, 3/8-16 (3 1/4")

MODEL SPECIFIC HARDWARE REQUIREMENTS


MODEL	DESCRIPTION	QTY	BOLT LENGTH	WASHER
QT8202	Generac/Honeywell, Kohler, Cummins, B&S Pwr. Prot. Series	2-4	1 1/2", 2 1/2", 2 3/4", 3 1/4", 4 1/2"	Cummins A and C All others B and C
QT8231	Generac/Honeywell	4	4 1/2", 2 1/2"	B and C

OPTIONAL ACCESSORIES

Anchors may be required to meet high wind loading, depending on the unit size and weight. Use the load tables included with the QwikPad® for Generators or go to our website.



GROUND ANCHOR KIT (PKG OF 2)

QT8382



CONCRETE ANCHOR KIT (PKG OF 4)

QT8381



QwikProducts® and QwikPad® are registered trademarks of Mainstream Engineering Corporation® Rockledge, Florida 32955, (321) 631-3550, © 2025 Mainstream Engineering Corporation®

U.S. Patents: #10,557,589, #11,384,896, #11,460,148, #11,460,149, #11,649,921, #D1,007,425, #D1,012,858, #D1,012,859

